


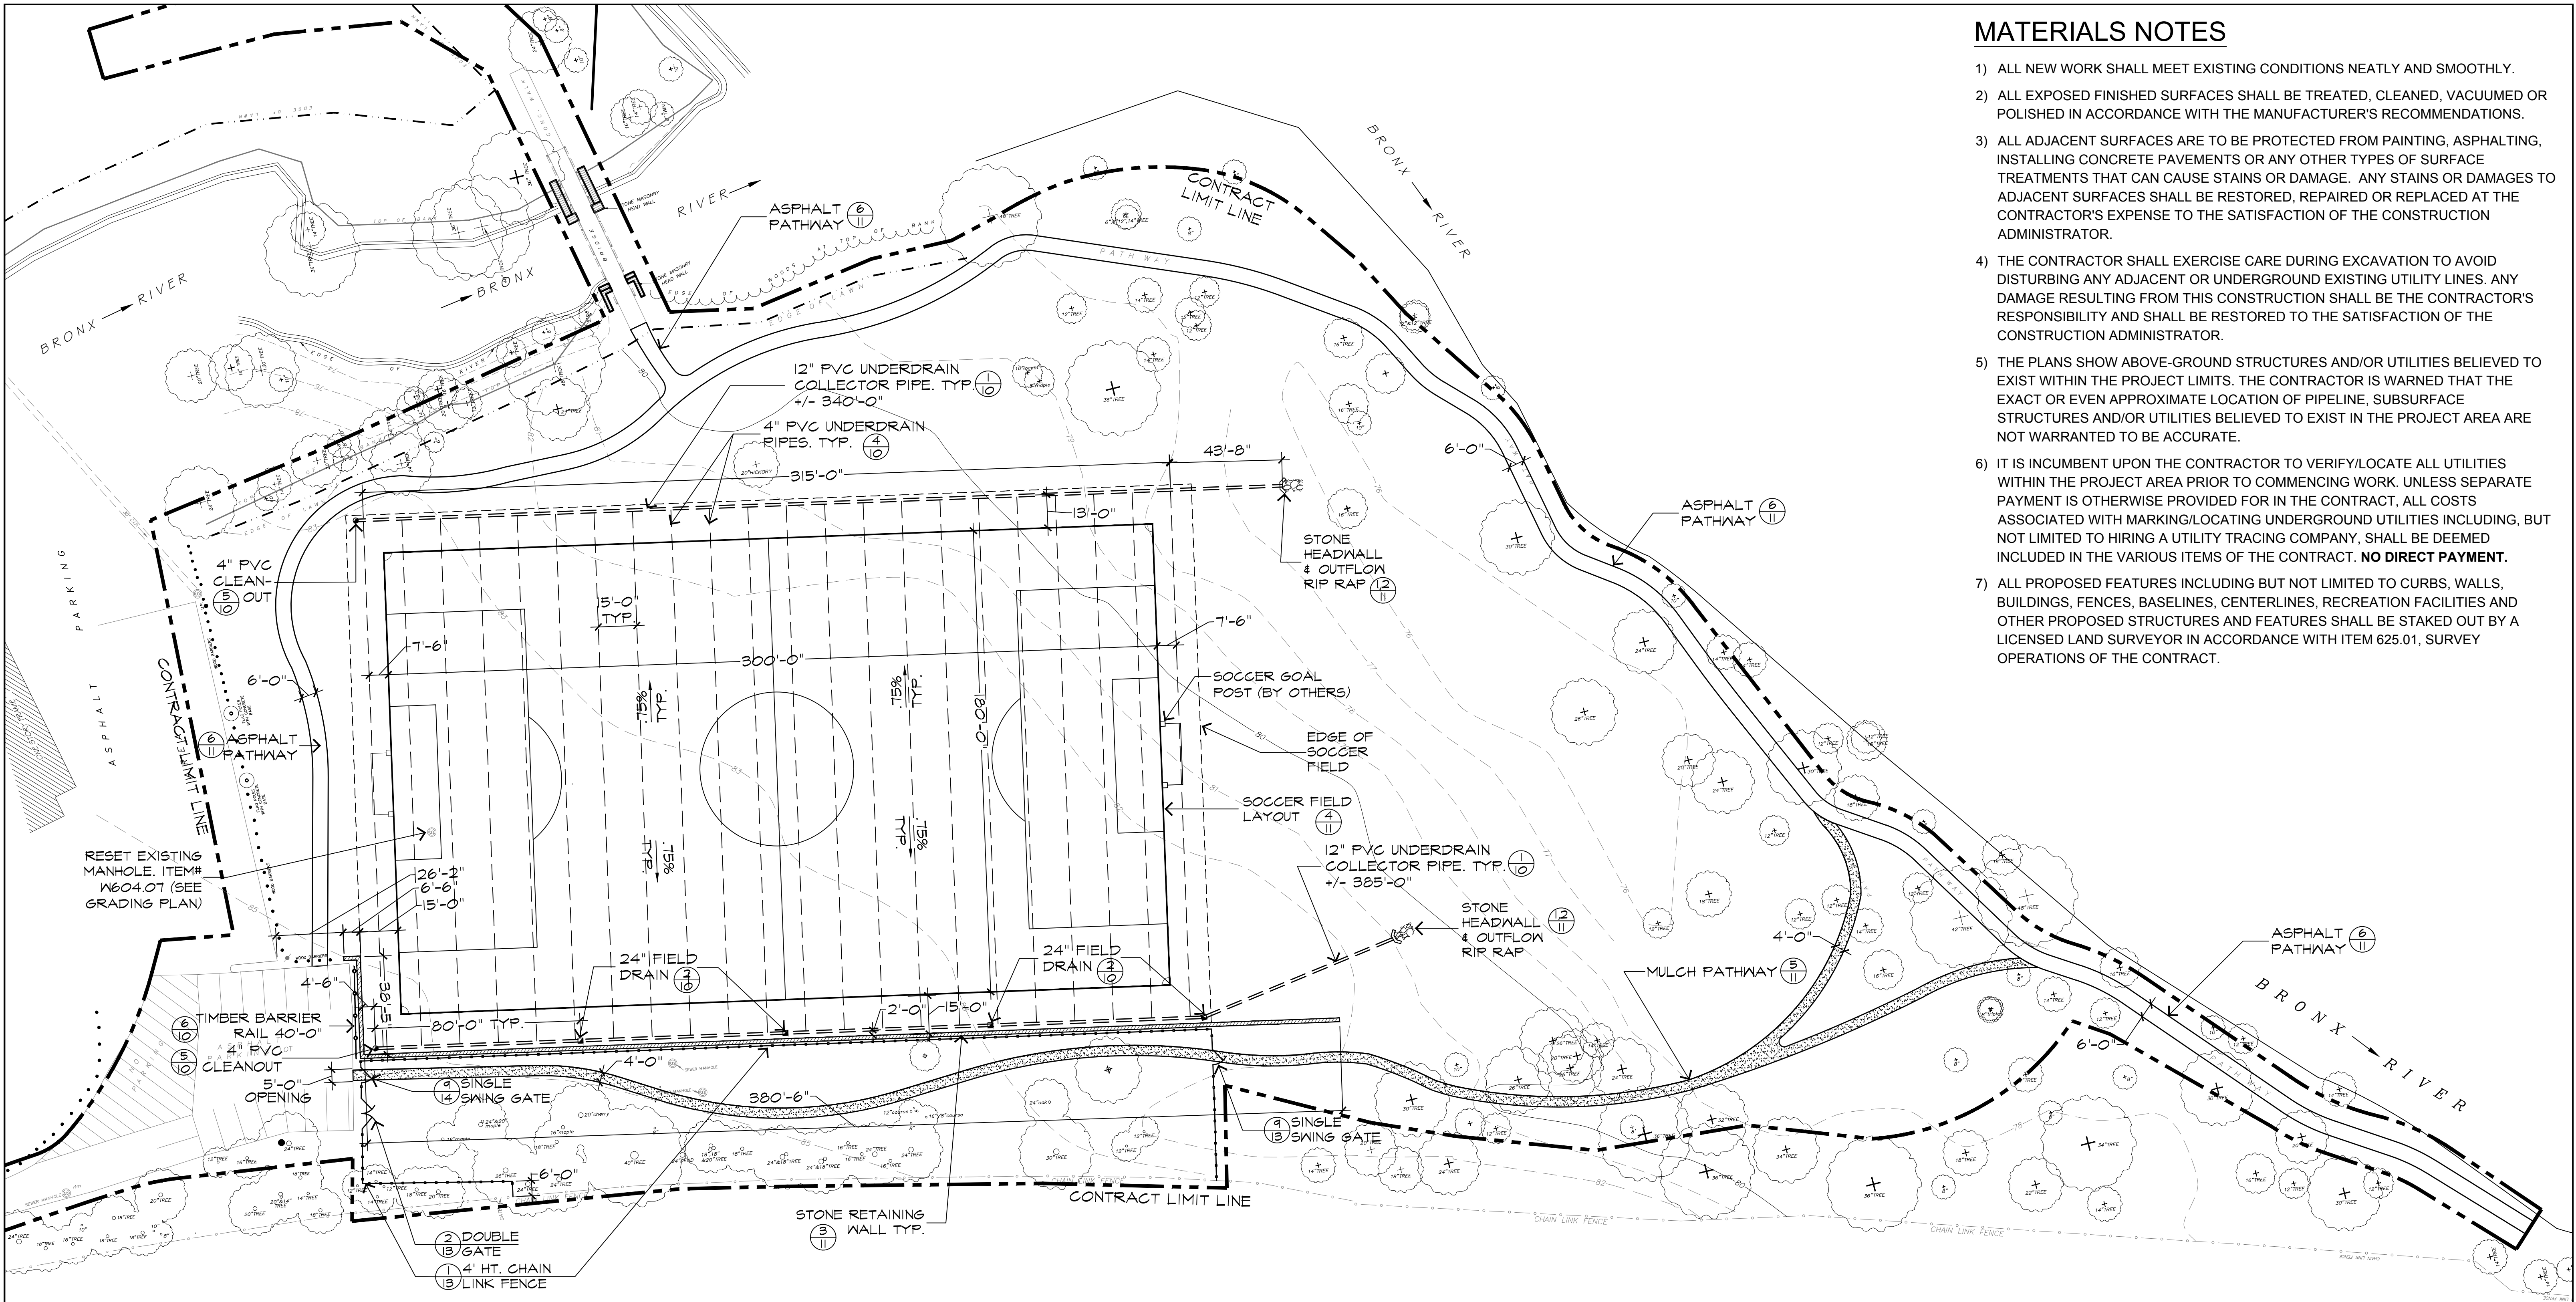

MATERIALS NOTES

- 1) ALL NEW WORK SHALL MEET EXISTING CONDITIONS NEATLY AND SMOOTHLY.
- 2) ALL EXPOSED FINISHED SURFACES SHALL BE TREATED, CLEANED, VACUUMED OR POLISHED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
- 3) ALL ADJACENT SURFACES ARE TO BE PROTECTED FROM PAINTING, ASPHALTING, INSTALLING CONCRETE PAVEMENTS OR ANY OTHER TYPES OF SURFACE TREATMENTS THAT CAN CAUSE STAINS OR DAMAGE. ANY STAINS OR DAMAGES TO ADJACENT SURFACES SHALL BE RESTORED, REPAIRED OR REPLACED AT THE CONTRACTOR'S EXPENSE TO THE SATISFACTION OF THE CONSTRUCTION ADMINISTRATOR.
- 4) THE CONTRACTOR SHALL EXERCISE CARE DURING EXCAVATION TO AVOID DISTURBING ANY ADJACENT OR UNDERGROUND EXISTING UTILITY LINES. ANY DAMAGE RESULTING FROM THIS CONSTRUCTION SHALL BE THE CONTRACTOR'S RESPONSIBILITY AND SHALL BE RESTORED TO THE SATISFACTION OF THE CONSTRUCTION ADMINISTRATOR.
- 5) THE PLANS SHOW ABOVE-GROUND STRUCTURES AND/OR UTILITIES BELIEVED TO EXIST WITHIN THE PROJECT LIMITS. THE CONTRACTOR IS WARNED THAT THE EXACT OR EVEN APPROXIMATE LOCATION OF PIPELINE, SUBSURFACE STRUCTURES AND/OR UTILITIES BELIEVED TO EXIST IN THE PROJECT AREA ARE NOT WARRANTED TO BE ACCURATE.
- 6) IT IS INCUMBENT UPON THE CONTRACTOR TO VERIFY/LOCATE ALL UTILITIES WITHIN THE PROJECT AREA PRIOR TO COMMENCING WORK. UNLESS SEPARATE PAYMENT IS OTHERWISE PROVIDED FOR IN THE CONTRACT, ALL COSTS ASSOCIATED WITH MARKING/LOCATING UNDERGROUND UTILITIES INCLUDING, BUT NOT LIMITED TO HIRING A UTILITY TRACING COMPANY, SHALL BE DEEMED INCLUDED IN THE VARIOUS ITEMS OF THE CONTRACT. **NO DIRECT PAYMENT.**
- 7) ALL PROPOSED FEATURES INCLUDING BUT NOT LIMITED TO CURBS, WALLS, BUILDINGS, FENCES, BASELINES, CENTERLINES, RECREATION FACILITIES AND OTHER PROPOSED STRUCTURES AND FEATURES SHALL BE STAKED OUT BY A LICENSED LAND SURVEYOR IN ACCORDANCE WITH ITEM 625.01, SURVEY OPERATIONS OF THE CONTRACT.


LAYOUT NOTES

- 1) WRITTEN DIMENSIONS SHALL PREVAIL.
- 2) ALL WOOD AND METAL DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
- 3) ALL ANGLES ARE 90 DEGREES UNLESS OTHERWISE SPECIFIED.
- 4) ALL DIMENSIONS PERTAINING TO CURBS AND/OR WALLS ARE FROM FACE OF CURB/WALL UNLESS OTHERWISE SPECIFIED.
- 5) CHANGES SHALL NOT BE MADE TO THE DESIGN OR LAYOUT WITHOUT PRIOR APPROVAL OF THE ENGINEER.
- 6) THE ENGINEER AND/OR THE CONSTRUCTION ADMINISTRATOR RESERVE THE RIGHT TO CHECK ANY AND ALL LINES, GRADES AND MEASUREMENTS OF THE WORK STAKED OUT BY THE CONTRACTOR FOR THEIR APPROVAL PRIOR TO ALLOWING THE CONTRACTOR PROCEED WITH CONSTRUCTION. THE ENGINEER AND/OR CONSTRUCTION ADMINISTRATOR RESERVE THE RIGHT TO MAKE MINOR MODIFICATIONS TO THE DESIGN OR LAYOUT OF THE WORK AS NEEDED.
- 7) CONTRACTOR SHALL PROTECT ALL EXISTING TREES TO REMAIN. CONTRACTOR SHALL COORDINATE WITH THE LANDSCAPE ARCHITECT TO VERIFY / IDENTIFY ALL TREES TO REMAIN.


LEGEND

	CONTRACT LIMIT LINE		4" PVC UNDER-DRAIN PIPES (4/10)		MULCH PATHWAY (5/11)
	EXISTING TREE		12" PVC UNDERDRAIN COLLECTOR PIPE (1/10)		ASPHALT PATHWAY (6/11)
	STONE RETAINING WALL (3/11)		24" FIELD DRAIN (2/10)		
			4" PVC CLEANOUT (5/10)		

SCALE: 1"=30'-0"

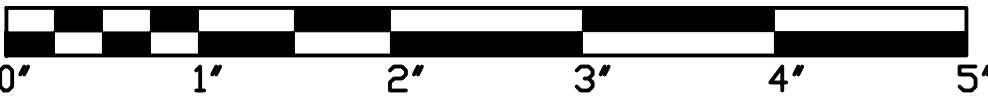

IN CHARGE OF ROBERT LOPANE
CHECKED BY ROBERT LOPANE
MADE BY KYLE SITZMAN

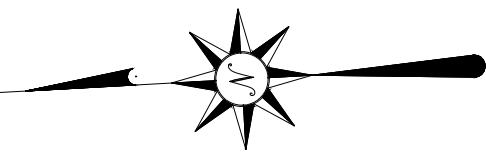

REVISION NUMBER	DATE	MADE BY	APP'D BY	REVISION

RECORD DRAWING CERTIFICATION			
☐ AS BUILT - CHANGES AS NOTED ☐ AS BUILT - NO CHANGES			
CONTRACTOR		PROJECT COORDINATOR	
NAME		NAME	
SIGNATURE		SIGNATURE	
TITLE		TITLE	
DATE		DATE	

WESTCHESTER COUNTY, NEW YORK DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION DIVISION OF ENGINEERING		CONTRACT NUMBER 17-541	SHEET NUMBER 6
SCOUT FIELD IMPROVEMENTS BRONX RIVER PARKWAY RESERVATION YONKERS, NY LAYOUT AND MATERIALS PLAN		SHEET NO. 6 OF 16 SCALE: 1"=30'-0" DATE: 04/17/19 DPW FILE NO. 37-12-G-38-0 REV. NO.	